

# Monotonous Receiver for FLIP-OFDM in Optical Wireless Communication

<sup>[1]</sup> A RAGHU VARDHAN BABU, <sup>[2]</sup> B.NANDA KUMAR

**Abstract**— To guarantee nonnegative signals in optical wireless communication (OWC) systems, flipped orthogonal frequency division multiplexing (Flip-OFDM) transmits the positive and negative parts of the signal over two consecutive OFDM sub frames (positive sub frame and negative sub frame, respectively). The conventional receiver for Flip-OFDM recovers the data by subtracting the negative sub frame from the positive one. However, the signal analysis shows that the signals in the two sub frames both contain the information of the transmitted data and can be used together to decode the data. An iterative receiver is then proposed to improve the transmission performance of Flip-OFDM by exploiting the signals in both sub frames. Simulation results show that the proposed iterative receiver provides significant signal to noise ratio (SNR) gain over the conventional receiver. Moreover, the iterative receiver also outperforms the existing advanced receiver

**Keywords**— Optical wireless communication (OWC), orthogonal frequency division multiplexing (OFDM), Flip-OFDM, iterative receiver.

## I. INTRODUCTION

WITH the widespread deployment of light-emitting diodes (LEDs), optical wireless communication (OWC) has attracted an increasing interest in academia and industry recently [1]. Due to its distinct advantages such as rich spectrum resources and high communication security, OWC has been anticipated to be an attractive alternative to radio frequency (RF) systems, especially in indoor scenarios. In addition, the convergence of illumination and communication makes OWC one of the most important green technologies [2].

In order to achieve high data rates and alleviate inter-symbol interference (ISI), orthogonal frequency division multiplexing (OFDM) has been employed in OWC [3]–[5]. Since intensity modulation and direct detection (IM/DD) is commonly used in OWC systems, the transmitted signals must be real and nonnegative. Real time-domain signals can be obtained by imposing Hermitian symmetry on the OFDM subcarriers. Furthermore, to deal with the issue of bipolarity in OFDM signals, several OFDM schemes have been proposed for OWC. For example, direct current (DC) biased optical OFDM (DCO-OFDM) [6], asymmetrically clipped optical OFDM (ACO-OFDM) [7] and pulse-amplitude-modulated discrete multi tone (PAM-DMT) [8]. There is a price paid with these three schemes. DCO-OFDM adds a DC bias to the OFDM symbols, which increases the power dissipation of

the signal significantly. ACO-OFDM and PAM-DMT do not need DC bias because of the clipping operation, but each has only half the spectral efficiency of DCO-OFDM. The authors in [9] proposed a novel OFDM technique named as Flip-OFDM in which positive and negative parts of the signal are separately transmitted over two consecutive OFDM sub frames. In [10], it was shown that Flip-OFDM can be modified to approach the spectral efficiency of DCO-OFDM without biasing, which contributes to the practical applications of Flip-OFDM in OWC.

In the conventional receiver for Flip-OFDM, the data is recovered by subtracting the negative signal block from the positive one [9]. This method is simple and straightforward. However, it increases the noise variance of the received symbols, making the performance much worse than that of bipolar OFDM with the same modulation method. To improve the performance of Flip-OFDM, a time-domain noise filtering technique was proposed in [11] and investigated in [12]. However, the algorithm does not make full use of the signal structures. In this letter, an iterative receiver is proposed for Flip-OFDM by fully exploiting the structures of the received signals. Simulations confirm that the proposed iterative receiver is superior to other receivers.

**Notations:** Bold italic letters denote column vectors. More specifically, a lowercase letter such as  $\mathbf{v}$  denotes a

time domain vector, and the uppercase letter such as  $V$  denotes the corresponding frequency-domain vector. A bold but not italic letter such as  $A$  denotes a matrix. Specially,  $0$  and  $I$  represent the zero and identity matrices with appropriate dimensions, respectively.  $(\cdot)^*$ ,  $(\cdot)^T$ ,  $(\cdot)^H$ ,  $|\cdot|$  and  $\text{sign}(\cdot)$  denote conjugate, transpose, Hermitian transpose, absolute value and sign (for convenience,  $\text{sign}(0) = 1$  is defined in this paper), respectively. The  $n$ -th element of a vector  $v$  is denoted by  $v(n)$ .  $\text{diag}(v)$  is a diagonal matrix with  $v$  on the main diagonal.

Orthogonal frequency division multiplexing (OFDM) and compatible usage in wireless standards like DVB, WIMAX, IEEE802.11a and LTE has been gained interest from worldwide research organizations. Recently an international meeting has conducted in order to discuss importance of orthogonal frequency division multiplexing (OFDM) and its usage in advance wireless standards makes Orthogonal frequency division multiplexing (OFDM) as an emerging technology to meet the requirements in practical scenario.

Orthogonal frequency division multiplexing (OFDM) has high data rates compared to traditional communications systems and it suited well for frequency selective channels. Large delay spreads is a drawback which commonly occurs in the high speed wireless communication system and orthogonal frequency division multiplexing (OFDM) modulation scheme has ability to transform the wide frequency selective channel to narrow ones which creates the robust environment to resist against occurrence of the large delay spreads and preserves the Orthogonality in a perfect way in the frequency domain. Orthogonal frequency division multiplexing (OFDM) has one more unique advantage to reduce the complexity in the system by introducing the cyclic prefix at the transmitter end and performing scalar equalization at the receiver end in the wireless standards like WIFI and WIMAX.

In 21<sup>st</sup> century, the role of the technology to offer high data rates and mobility is crucial and the technology is changing its face every other because of immense research work carried out on the advance wireless communications. Actually the research on parallel data transmission is traced out in the mid 1960's but it takes 25 long years to make it compatible to real time applications.

The OFDM gradually seen its presence in the various application and now various international standards consider it as promising modulation scheme which initially supports wireless standards like WIFI, WIMAX, LTE etc.


The two important parameters required better transmission of data from one entity to another are data rate and the modulation scheme should support different channel conditions to obtain better spectral efficiency.

**II. SYSTEM MODEL**

The block diagram of a Flip-OFDM transmitter with  $N$  subcarriers is illustrated in Fig. 1 [9]. To ensure that the time-domain signal is real in IM/DD systems, the input data vector  $X = [X(0), X(1), \dots, X(N - 1)]^T$  should satisfy the Hermitian symmetry property, i.e.,

$$X(k) = X^*(N - k), k = 1, 2, \dots, N/2 - 1. \quad (1)$$

Note that  $X(0)$  and  $X(N/2)$  are usually set to zero since the DC part of OFDM signal is left unused in practical applications. Hence, the time-domain signal vector  $x =$

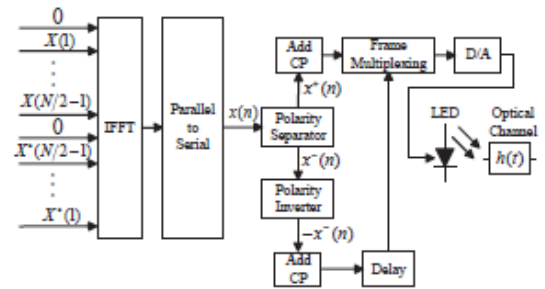

**Fig. 1: Block diagram of a Flip-OFDM transmitter**

$[x(0), x(1), \dots, x(N - 1)]$  after inverse fast Fourier transform (IFFT) operation can be represented as

$$\begin{aligned} x(n) &= \frac{1}{\sqrt{N}} \sum_{k=0}^{N-1} X(k) \exp(j2\pi kn/N) \\ &= \frac{2}{\sqrt{N}} \sum_{k=1}^{N/2-1} \text{Re}[X(k) \exp(j2\pi kn/N)] \quad (2) \\ n &= 0, 1, \dots, N - 1. \end{aligned}$$

The signal  $x(n)$ , which is real and bipolar, can be decomposed as  $x$

$$x(n) = x^+(n) + x^-(n), \quad (3)$$

where the positive part  $x^+(n)$  and the negative part  $x^-(n)$  are defined as

$$x^+(n) = \begin{cases} x(n), & x(n) \geq 0 \\ 0, & x(n) < 0 \end{cases}, \quad (4)$$


$$x^-(n) = \begin{cases} x(n), & x(n) < 0 \\ 0, & x(n) \geq 0 \end{cases}. \quad (5)$$

To guarantee a nonnegative time-domain signal, the two components  $x^+ = [x^+(0), x^+(1), \dots, x^+(N-1)]^T$  and  $x^- = [x^-(0), x^-(1), \dots, x^-(N-1)]^T$  are separately transmitted over two successive OFDM sub frames. The positive component  $x^+$  is transmitted in the first sub frame (positive sub frame), while the flipped negative component  $-x^-$  is transmitted in the second sub frame (negative sub frame). An example of the time domain signals in Flip-OFDM is illustrated in Fig. 2. After propagating through the optical channel, the unipolar time domain signal is received by a photo detector. Assuming the channel impulse response  $h = [h(0), h(1), \dots, h(N-1)]^T$  is constant over two consecutive OFDM sub frames, the received signal vectors in the frequency domain are given by

$$Y^+ = HX^+ + Z^+, \quad (6)$$

$$Y^- = -HX^- + Z^-, \quad (7)$$

where  $H = \text{diag}(W_N h)$ ,  $X^+ = W_N x^+$ ,  $X^- = W_N x^-$ ,  $W_N$  is the  $N \times N$  discrete Fourier transform (DFT) matrix,  $Z^+$  and  $Z^- \sim N(0, \sigma^2 I)$ , represent the noise vectors of the two sub frames, respectively.

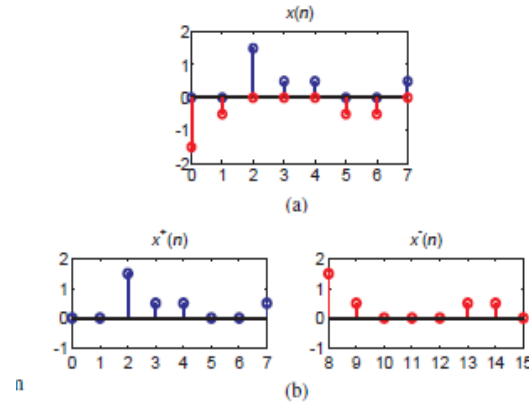

**Fig. 2. An example of the time domain signals in Flip-OFDM (N = 8). (a)  $x(n)$ . (b)  $x^+(n)$  and  $x^-(n)$ .**

### III. RECEIVER DESIGN

#### A. Conventional Receiver

In [9], a receiver is proposed for Flip-OFDM. This receiver subtracts the negative sub frame from the positive one to decode the data. To facilitate the following descriptions, the receiver proposed in [9] is named as the conventional receiver in this paper. Subtracting (7) from (6) yields

$$\begin{aligned} Y^+ - Y^- &= HX^+ + HX^- + Z^+ - Z^- \\ &= HX + Z, \end{aligned} \quad (8)$$

where  $Z = Z^+ - Z^-$ . Then, the conventional receiver can be described as

$$\hat{X}_{\text{conv}} = \text{dec}[H^{-1}Y^+ - H^{-1}Y^-]. \quad (9)$$

Where  $\text{dec}[\cdot]$  represents the decision of the detector.

#### B. Proposed Receiver

The conventional receiver is simple and straightforward, but it does not fully exploit the structures of the received signals. In the following, a new receiver is proposed by establishing the relationship between the received signals  $Y^+$ ,  $Y^-$  and the input data  $X$ . Since  $|x|$  can be expressed as

$$\begin{aligned} |x| &= S(X)x \\ &= S(X)W_N^H X, \end{aligned} \quad (10)$$

where  $S(X)$  is defined as

$$\begin{aligned} S(X) &= \text{diag}\{\text{sign}(x)\} \\ &= \text{diag}\{\text{sign}(W_N^H X)\}, \end{aligned} \quad (11)$$

one can rewrite (4) as

$$\begin{aligned} x^+ &= \frac{x + |x|}{2} \\ &= \frac{x + S(X)W_N^H X}{2}. \end{aligned} \quad (12)$$

From (12) and  $X^+ = W_N x^+$ , it is easy to get

$$\begin{aligned} X^+ &= W_N \frac{x + S(X)W_N^H X}{2} \\ &= \frac{I + W_N S(X)W_N^H}{2} X. \end{aligned} \quad (13)$$

Substituting (13) into (6) gives

$$Y^+ = \frac{H + HW_N S(X)W_N^H}{2} X + Z^+. \quad (14)$$

Similarly, by using (7) and  $x^- = \frac{x - |x|}{2}$ , the relationship between  $Y^-$  and  $X$  can be derived as

$$Y^- = \frac{HW_N S(X)W_N^H - H}{2} X + Z^-. \quad (15)$$

(14) and (15) show the structures of the received signals in the two sub frames, respectively. They can be concatenated to

$$\begin{bmatrix} Y^+ \\ Y^- \end{bmatrix} = \frac{1}{2} \begin{bmatrix} H + HW_N S(X)W_N^H \\ HW_N S(X)W_N^H - H \end{bmatrix} X + \begin{bmatrix} Z^+ \\ Z^- \end{bmatrix}. \quad (16)$$

(14) and (15) show the structures of the received signals in the two sub frames, respectively. They can be concatenated to

$$G(X) = \frac{1}{2} \begin{bmatrix} H + HW_N S(X)W_N^H \\ HW_N S(X)W_N^H - H \end{bmatrix}, \quad (17)$$

the ZF matrix can be derived as

$$T_{ZF}(X) = [G^H(X)G(X)]^{-1}G^H(X). \quad (18)$$

Then, the estimate of  $X$  is given by

$$\bar{X} = T_{ZF}(X) \begin{bmatrix} Y^+ \\ Y^- \end{bmatrix}. \quad (19)$$

The matrix  $T_{ZF}(X)$  is dependent on the data vector  $X$ , an iterative receiver can thus be proposed as

$$\hat{X}^{(i)} = \begin{cases} \text{dec}[H^{-1}Y^+ - H^{-1}Y^-], & i = 0 \\ \text{dec}\left\{T_{ZF}(\hat{X}^{(i-1)}) \begin{bmatrix} Y^+ \\ Y^- \end{bmatrix}\right\}, & i = 1, \dots, K \end{cases}, \quad (20)$$

where  $i$  is the index of iteration and  $K$  is the maximum number of iterations. Note that, when  $K = 0$ , the proposed iterative receiver in (20) is equivalent to the conventional receiver in (9).

Particularly, in line-of-sight (LOS) channels, the channel response can be expressed as

$$h(n) = c\delta(n), \quad (21)$$

where  $c$  is a constant and  $\delta(n)$  is the dirac delta function. Since  $c$  scales the signal-to-noise ratio (SNR) only, without loss of generality,  $c$  is set to one to simplify the derivations [14]. In this case, one can obtain  $H = I$ ,  $GH(X)G(X) = I$  and  $T_{ZF}(X) = GH(X)$ . Therefore, the estimate of  $X$  can be simplified as

$$\begin{aligned} \bar{X}_{LOS} &= \frac{1}{2}[I + W_N S(X)W_N^H]Y^+ \\ &\quad + \frac{1}{2}[W_N S(X)W_N^H - I]Y^-, \end{aligned} \quad (22)$$

and the iterative receiver becomes

$$\hat{X}_{LOS}^{(i)} = \begin{cases} \text{dec}[Y^+ - Y^-], & i = 0 \\ \text{dec}\left\{\frac{1}{2}[I + W_N S(\hat{X}_{LOS}^{(i-1)})W_N^H]Y^+ + \frac{1}{2}[W_N S(\hat{X}_{LOS}^{(i-1)})W_N^H - I]Y^-\right\}, & i = 1, \dots, K \end{cases}. \quad (23)$$

By applying the additive property of DFT, the equivalent time domain form of (22) can be expressed as

$$\begin{aligned} \bar{x}_{LOS}(n) &= \frac{1}{2}\{1 + \text{sign}[x(n)]\}y^+(n) \\ &\quad + \frac{1}{2}\{\text{sign}[x(n)] - 1\}y^-(n). \end{aligned} \quad (24)$$

It can be observed from (24) that in LOS channels, the main difference between the conventional receiver and the proposed receiver is the weight multiplied by  $y^+(n)$  or  $y^-(n)$ . This is very useful for reducing the implementation cost of the proposed receiver in LOS channels.

**C. Computational Complexity**


In this subsection, we analyze the computational complexity of different receivers with order notation. Since the conventional receiver and the noise filtering receiver in [11] both include a single fast Fourier transform (FFT) operation, each of them has a complexity of  $O(N \log N)$ . For the proposed iterative receiver, the computational complexity is related to the channel characteristics. In non-line-of-sight (NLOS) channels, the iterative receiver has a complexity of  $O(N^3)$  per iteration due to the matrix inversion of the ZF estimator. In LOS channels, the complexity of the iterative receiver is  $O(N \log N)$  per iteration because the matrix inversion is avoided. It should be noted that the iterative receiver needs additional IFFT operations with complexity of  $O(N \log N)$  to estimate  $S(X)$  in either LOS channels or NLOS channels.

**IV. NUMERICAL RESULTS**

In this section, the bit error rate (BER) performance of the proposed iterative receiver is evaluated by simulations. The number of subcarriers is 64, the length of cyclic prefix (CP) is 16, and 16-QAM is used for constellation mapping. Both LOS and NLOS channels are tested with the parameters of configuration A in [15]. For comparison, the BER curves corresponding to the noise filtering receiver and the case in (19) where the sign matrices are perfectly known ("lower bound") are also plotted.


Fig. 3 shows the BER performance of the iterative receiver with different iteration numbers. It can be seen that the performance of the iterative receiver can be improved by increasing the iteration number  $K$ . However, when  $K \geq 2$ , almost no additional gain can be achieved by further increasing  $K$ . Therefore, setting  $K = 2$  is enough to achieve a noticeable performance gain while keeping relatively low complexity and delay.

Fig. 4 presents the BER performance of different receivers. It can be seen that the iterative receiver achieves a noticeable gain over the conventional receiver in any case. For example, in NLOS channels, the SNR gain over the conventional receiver is about 4 dB at the BER of  $10^{-4}$ .

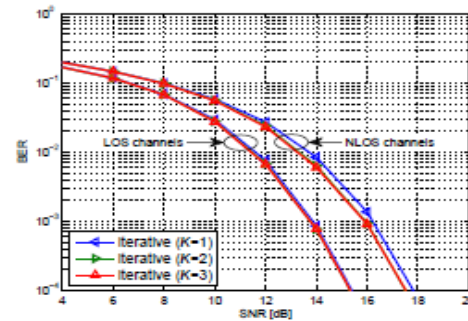


**Fig. 3.**

**BER performance of the iterative receiver with different iteration numbers.**

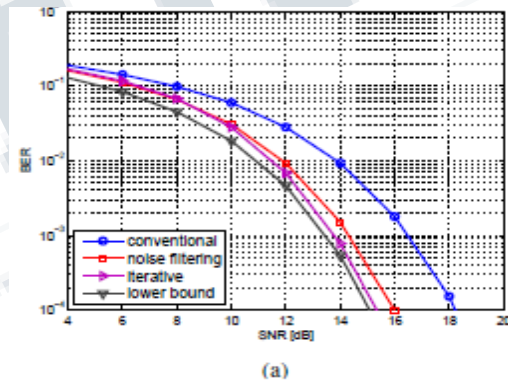

**Fig. 4. BER comparison of different receivers for Flip-OFDM. LOS channels.**

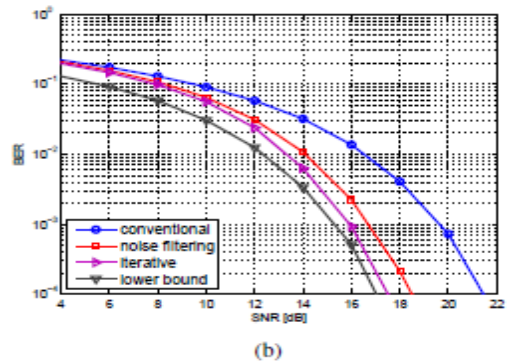

**Fig. 5. BER comparison of different receivers for Flip-OFDM. NLOS channels**

The significant performance improvement results from the fact that the iterative receiver fully exploits the signal structures. Moreover, the proposed receiver also outperforms the noise filtering receiver. Specifically, at the BER of  $10^{-4}$ , the iterative receiver provides 0.6 dB and 1 dB gains over the noise filtering receiver in LOS channels and NLOS channels, respectively.

**V. CONCLUSION**

In this paper, an iterative receiver is proposed for Flip OFDM in IM/DD based OWC systems. In order to improve the receiver performance, the iterative receiver obtains the additional diversity gain by exploiting the signals in both the positive sub frame and negative sub frame. The simulation results show that the iterative receiver with only two iterations provides a significant SNR gain over the conventional receiver. Moreover, the receiver is also superior to the existing advanced receiver. It should be noted that the proposed iterative receiver can also be applied to the modified Flip-OFDM system proposed in [10] and the multiple-input multiple-output (MIMO) system proposed in [16].

**REFERENCES**

- [1] H. L. Minh, D. O'Brien, G. Faulkner, L. Zeng, K. Lee, D. Jung, Y. Oh, and E. T. Won, "100-mb/s NRZ visible light communications using a postequalized white led," *IEEE Photonics Technology Letters*, vol. 21, no. 15, pp. 1063–1065, Aug. 2009.
- [2] J.-B. Wang, Q.-S. Hu, J. Wang, M. Chen, and J.-Y. Wang, "Tight bounds on channel capacity for dimmable visible light communications," *Journal of Light wave Technology*, vol. 31, no. 23, pp. 3771–3779, Dec. 2013.
- [3] J. Armstrong, "OFDM for optical communications," *Journal of Lightwave Technology*, vol. 27, no. 3, pp. 189–204, Feb. 2009.
- [4] D. J. Barros, S. K. Wilson, and J. M. Kahn, "Comparison of orthogonal frequency-division multiplexing and pulse-amplitude modulation in indoor optical wireless links," *IEEE Transactions on Communications*, vol. 60, no. 1, pp. 153–163, Jan. 2012.
- [5] N. Huang, J.-B. Wang, J. Wang, C. Pan, H. Wang, and M. Chen, "Receiver design for PAM-DMT in indoor optical wireless links," *IEEE Photonics Technology Letters*, vol. 27, no. 2, pp. 161–164, Jan. 2015.
- [6] J. Armstrong and B. Schmidt, "Comparison of asymmetrically clipped optical OFDM and DC-biased optical OFDM in AWGN," *IEEE Communications Letters*, vol. 12, no. 5, pp. 343–345, May 2008.
- [7] J. Armstrong and A. Lowery, "Power efficient optical OFDM," *Electronics Letters*, vol. 42, no. 6, pp. 370–372, Mar. 2006.
- [8] S. C. J. Lee, S. Randel, F. Breyer, and A. M. Koonen, "PAM-DMT for intensity-modulated and direct-detection optical communication systems," *IEEE Photonics Technology Letters*, vol. 21, no. 23, pp. 1749–1751, Dec. 2009.
- [9] N. Fernando, Y. Hong, and E. Viterbo, "Flip-OFDM for optical wireless communications," in *Proc. 2011 IEEE Information Theory Workshop (ITW)*, 2011, pp. 5–9.
- [10] D. Tsonev and H. Haas, "Avoiding spectral efficiency loss in unipolar OFDM for optical wireless communication," in *Proc. 2014 IEEE International Conference on Communications (ICC)*, pp. 3336–3341.
- [11] N. Fernando, Y. Hong, and E. Viterbo, "Flip-OFDM for unipolar communication systems," *IEEE Transactions on Communications*, vol. 60, no. 12, pp. 3726–3733, Dec. 2012.
- [12] D. Tsonev, S. Sinanovic, and H. Haas, "Novel unipolar orthogonal frequency division multiplexing (U-OFDM) for optical wireless," in *Proc. 2012 IEEE 75th Vehicular Technology Conference (VTC Spring)*, pp. 1–5.

[13] E. G. Larsson, "MIMO detection methods: How they work," IEEE Signal Processing Magazine, vol. 26, no. 3, pp. 91–95, May 2009.

[14] J. Karout, E. Agrell, K. Szczerba, and M. Karlsson, "Optimizing constellations for single-subcarrier intensity-modulated optical systems," IEEE Transactions on Information Theory, vol. 58, no. 7, pp. 4645–4659, July 2012.

[15] J. R. Barry, J. M. Kahn, W. J. Krause, E. A. Lee, and D. G. Messerschmitt, "Simulation of multipath impulse response for indoor wireless optical channels," IEEE Journal on Selected Areas in Communications, vol. 11, no. 3, pp. 367–379, Apr. 1993.

[16] L. Wu, Z. Zhang, and H. Liu, "MIMO-OFDM visible light communications system with low complexity," in Proc. 2013 IEEE International Conference on Communications (ICC), pp. 3933–3937.

**Author 1:**



He received his M.Tech degree in DSCE from Jaya Prakash narayan College of Engineering, B.Tech degree in Electronics and Communication Engineering from Jaya Prakash narayan College of Engineering, and His interested areas are Image Processing and communications.

**Author 2:**

He is a PhD Scholar in Osmania University. His interested areas are communications and Image Processing.