

# Experimental Investigation on Modified Exhaust Treatment System for Diesel Engine Emissions

<sup>[1]</sup>T.Devarajulu Reddy <sup>[2]</sup>F.Anand Raju  
<sup>[1]</sup>M.Tech, Student <sup>[2]</sup>Associate Professor  
<sup>[1][2]</sup>Siddhartha Group of institutions, Puttur, A.P-517583

**Abstract:** -- A new kind of exhaust after-treatment system having Diesel Particulate Filter, Three Way Catalytic (TWC) converter (in substitution of SCR & Oxidation catalyst) with new kind of DEF/Ad blue-Dosing Module with Manual Control, Supply Line strategy and Supply module, is prepared in order to Finding the scope for increasing the efficiency of a Urea-SCR system. The results show that there is a 85% reduction in the CO and HC emissions after arranging the setup. It is also found that on an average there is a 75% reduction in the NO<sub>x</sub>.

**Keyword:**-- Diesel Engine; TWC; DEF/ Ad blue; Urea-SCR; DPF; Emissions

## I. INTRODUCTION


The introduction of exhaust gas after treatment system for diesel engines is a measure to fulfill the legislation requirements. Selective catalytic reduction (SCR) with urea solutions are considered to be promising for this better performance. Particularly the urea- purification with no fuel penalty and high durability to sulfur-contained fuels. Therefore, in Europe, on road demonstrations of the Urea-SCR systems are conducted and practical application of the Urea-SCR systems is being discussed together with the infrastructure for supplying urea solutions. However, there are problems yet to be solved for practical usage of Urea-SCR systems. The selective catalytic reduction (SCR) process is a well-established concept, but yet commercially not proved technology for nitrogen oxide [NO<sub>x</sub>] emission control for automobiles. The first one is the low activation for NO<sub>x</sub> reduction and NH<sub>3</sub> slip under low exhaust gas temperatures and transient conditions encountered in real operating conditions. In particular, ammonia [NH<sub>3</sub>] SCR featured by a reluctant [NH<sub>3</sub>] is added to the exhaust gas is recognized as a flexible remedy for mobile diesel NO<sub>x</sub> emission. One of the major challenges in the automobile application of the NH<sub>3</sub> SCR process is the enhancement of the de-NO<sub>x</sub> performance at low exhaust gas temperatures

Below 300°C and on board storage of urea. one of the important factors that is to be considered is evaporation of nh<sub>3</sub> liquid i.e. ad blue solution with exhaust gas. one of the feasible methods to promote de-nox activity at low temperatures is to lead the reaction to pass through the fast scr path for the betterment of surface reaction and gas phase

reaction, i have tried with vaporization by new kind of def/ ad blue-dosing module with manual control, supply module & supply line (made of copper material) wounded around the exhaust pipe in order to raise the temperature of def.


## II. DIESEL PARTICULATE FILTER

The catalyst contains fibrous ceramic filters are made from several different types of ceramic fibers that are mixed together to form a porous media. fibrous filters have an advantage over wall flow design of producing lower back pressure. the porosity can be controlled in order to produce high flow, lower efficiency or high efficiency lower volume filtration ceramic wall-flow filters remove carbon particulates almost completely, including fine particulates less than 100 nanometers (nm) diameter with an efficiency of >95% in mass and >99% in number of particles over a wide range of engine operating conditions. since the continuous flow of soot into the filter would eventually block it, it is necessary to 'regenerate' the filtration properties of the filter by burning-off the collected particulate on a regular basis. soot particulates burn-off forms water and co<sub>2</sub> in small quantity amounting to less than 0.05% of the co<sub>2</sub> emitted by the engine, as shown below fig. 1.

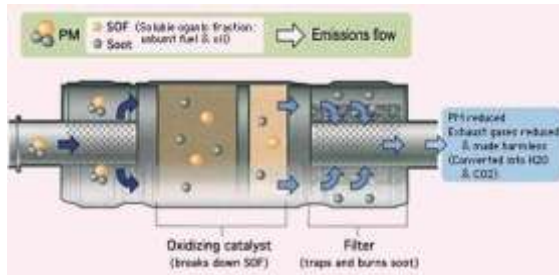

**Fig. 1. DPF  
Three Way Catalytic (TWC) Converter**

This catalyst takes its name from controlling the three major emissions in an engine that are  $NO_x$ , VOCs and carbon monoxide. The catalyst commonly contains an alumina wash coat supported on a honey comb shape ceramic brick as shown in fig.2. Precious metals are coated onto the alumina. The platinum/rhodium components act as the active sites to carry out reduction reactions, while platinum/palladium acts as a active component for oxidation reactions. The active part of the catalyst is further divided into oxidation and the reduction catalyst sites.

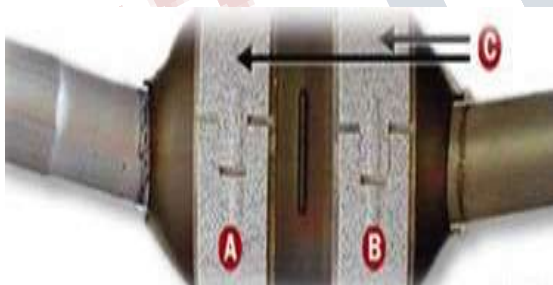


**Fig. 2. Section of TWC**

**A: Reduction Catalyst B: Oxidation Catalyst C: Honeycomb Ceramic Structure**

Reduction of nitrogen oxides to nitrogen and oxygen:  $2NO_x \rightarrow xO_2 + N_2$


Oxidation of carbon monoxide to carbon dioxide:




Oxidation of unburnt hydrocarbons (HC) to carbon dioxide and water :  $C_xH_{2x+2} + [(3x+1)/2] O_2 \rightarrow xCO_2 + (x+1) H_2O$

### Ad blue / DEF

Diesel exhaust fluid (def) is a solution made of purified water and 35% urea. This is the carrying agent for the ammonia needed to reduce nitrogen oxide ( $NO_x$ ) emissions from vehicles into nitrogen, water and carbon-dioxide. Urea decomposition reaction



### Ammonia Reaction



## III. EXPERIMENTAL DETAILS

Dosing quantity	160 g/h @1.5 bar
Atomization	~400 μm (Sauter Mean Diameter)
Ambient Conditions (with air cooling)	
Supply Module/tank	-30.....70°C
Dosing Module	-30.....120°C
Operating Voltage	12 V
Injection line between Supply Module & Dosing Module (length)	3800 mm
Supply Line Material, Cross section & Varying diameter(s)	Circular tube & 3mm to 1.5mm, Copper
Nozzle Material	Brass
DEF Tank Material	Plastic
Nozzle Type	Single Hole

### A. Experimental Systems and Description

The experimental set up consists of single cylinder 4-stroke di engine with 80mm bore-diameter, 110mm stroke length, rated speed of 1500rpm, 5 bhp/3.7 kw rated power and water cooled engine.

### B. Various Parts of Experimental Setup

1. Kirloskar engine
2. Alternator/dynamometer
3. Alternative fuel tank
4. Air filter
5. Three-way valve
6. Exhaust pipe
7. DPF
8. Multigas analyzer
9. Diesel tank
10. Burette
11. Three way valve
12. Control panel
13. TWC



*Fig.3. Exhaust system with engine*

### C. Technical Features of modified DEF – system

As first pure diesel is allowed to run the engine for about 30 min, so that engine gets warmed up and it will come steady state conditions. Before starting the engine, the lubricating oil level in the engine is checked and it is also ensured that all moving and rotating parts are lubricated. The various steps involved in the setting of the experiments are explained below,


### D. Experimental Procedure

- ❖ Precautions are taken, before starting the experiment on selected engine.
- ❖ The engine is started at no load condition.
- ❖ After that engine is allowed to run at rated speed of 1500rpm at least 10 minutes for stabilization.
- ❖ The multigas analyzer is prepared to take the required readings of engine emissions.
- ❖ Then at 0 kw the probe of the multigas analyzer is placed at the exhaust tail pipe and readings are noted.
- ❖ The above experimental procedure is repeated for different loads from no load to 2 kw load, for the same engine at rated speed of 1500rpm in three modes as follows:
- ❖ With-out connecting exhaust after treatment system at the end of exhaust tail pipe.
- ❖ With catalytic converters (DPF + TWC) connected at the end of exhaust tail pipe.
- ❖ With Catalytic Converters (DPF + TWC) And Def/ Ad Blue-Dosing System Are Connected At The end of exhaust tail pipe.

- ❖ After completion of the test, the load on the engine is completely relieved and then the engine is stopped.

## III. RESULTS AND DISCUSSIONS


Experiments are conducted when the engine is fuelled with pure diesel. The experiment covered a range of loads. The emission characteristics of the engine are observed in terms of concentration of co, hc, o<sub>2</sub>, no<sub>x</sub> and co<sub>2</sub>. The results obtained for with DPF+TWC converter +def system connected at the end of exhaust tail pipe are compared with DPF+TWC converter connected at the end of exhaust tail pipe and without connecting exhaust after treatment system at the end of exhaust tail pipe. The results obtained are represented in the graphical form as follows:

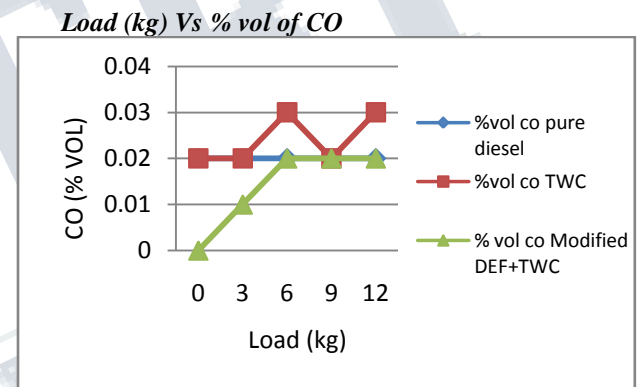

*Fig 4.1: Load Vs CO (% vol)*

The above graph shows the emission of CO (% vol) at different load condition from no load condition to 12 kg. CO emission for DPF+ Modified DEF and TWC converter system connected at the end of exhaust tail pipe is lower when compared with and without connecting DPF+TWC catalytic converter at the end of exhaust tail pipe.


**Load (kg) Vs HC (PPM Hex)**

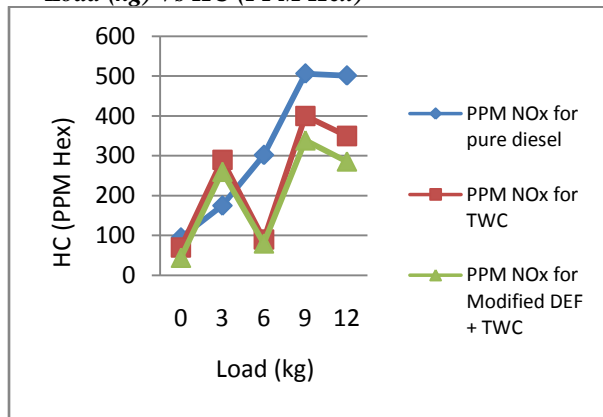

**Fig 4.2: Load (kg) Vs HC (PPM Hex)**

The above graph shows the emission of hc (ppm hex) at different load condition from no load condition to 12 kg. Hc emission for DPF +modified def and TWC converter system connected at the end of exhaust tail pipe is lower when compared with and without connecting DPF+TWC catalytic converter at the end of exhaust tail pipe.


**Load (kg) Vs CO2 (% vol)**

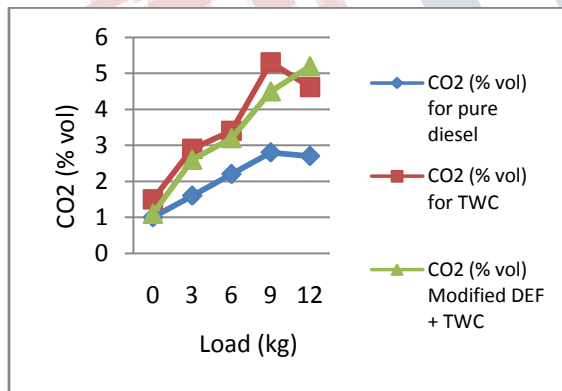

**Fig 4.3: Load (kg) Vs CO2 (% vol)**

The above graph shows the emission of co2 (% vol) at different load condition from no load condition to 12 kg. Co2 emission for DPF +modified def and TWC converter system connected at the end of exhaust tail pipe is lower when compared with and without connecting DPF+TWC catalytic converter at the end of exhaust tail pipe.

**Load (kg) Vs PPM NOx**

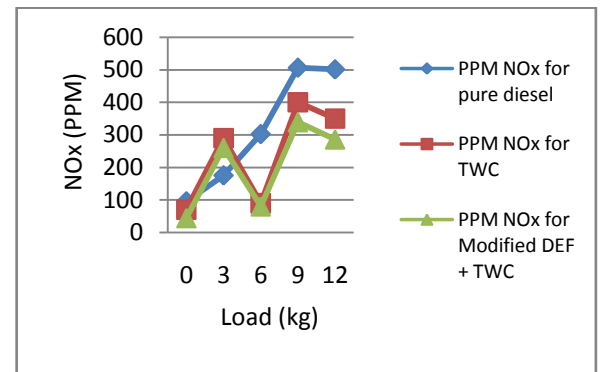

**Fig 4.4: Load (kg) Vs NOx (PPM)**

The above graph shows the emission of nox (ppm) at different load condition from no load condition to 12 kg. Nox emission for DPF +modified def and TWC converter system connected at the end of exhaust tail pipe is lower when compared with and without connecting DPF+TWC catalytic converter at the end of exhaust tail pipe.

As per the above results, the following conclusion is made for selected diesel engine to meet the diesel engine emissions legislation.

#### IV. CONCLUSION

From the above analysis the main conclusion is DPF+TWC converter +def system is suitable for diesel engines exhaust after-treatment system as this system produces lesser emission than existing at all loads.

#### REFERENCES

- [1] James G. Speight "Chemical Process and Design Handbook" Professional Publishing, McGraw-Hill, Two Penn Plaza, New York, NY 10121-2298, 2002
- [2] Heywood, J.B., "Internal Combustion Engine Fundamentals", McGraw-Hill Book Co., Singapore, 1988.
- [3] www.cumminsemissionsolutions.com Bulletin 4973772 Printed in U.S.A. Rev 10/11, Cummins Inc © 2011
- [4] Model Based Optimization of a Complete Diesel Engine/SCR System (ISSN 0282-1990) © Claes Ericson, All rights reserved Printed in Sweden by Media-Tryck, Lund 2009.

- [5]“www.autocatalyst-recycling.umicore.com“UmicorePrecious metals refining website- “Feb2012”.
- [6] “http://www.aecc.be/en/Technology/Catalysts.html”, 2012. International Journal of Science and Advanced Technology (ISSN 2221-8386) “http://www.ijSAT.com”. Vol.1 No 5 July 2011.
- [7] “www.bosch-diesel.de” Robert Bosch GmbH 2011.
- [8] Diesel Net website “www.dieselnets.com” copy right ©1997 - 2007 Ecopoint Inc “Jan-2012”.
- [9]“http://en.wikipedia.org/wiki/Diesel\_particulate\_filter”,2012.
- [10]“www.bosch-diesel.de” Robert Bosch GmbH 2011.
- [11]“www.wikipedia.org” Wikipedia®- trademark of the Wikimedia Foundation Inc- “Jan- 2007”.
- [12]“www.epa.gov” U.S Environmental protection agency, website- “Jan-2007”.
- [13]“www.ec.gc.ca” The Green Lane™, Environment Canada's World Wide Web site- “Jan- 2007”.
- [14] Heywood, J.B., “Internal Combustion Engine Fundamentals”, McGraw-Hill Book Co., Singapore, 1988.
- [15] Diesel Net website “www.dieselnets.com” copy right © 1997 - 2007 Ecopoint Inc “Jan-2007”.