

Seismic Analysis of Concrete Filled Steel Tubular Column and H- Steel Beam of Normal and Reduced Beam Sections

^[1] Er. Nimmy Abraham, ^[2] Er. Gopika Moorthy, ^[3] Er. Prashanth Krishnan

^[1] PG Student, Saintgits College of Engineering Pathamuttom, Kerala, India.

^[2] Assistant Professor, Saintgits College of Engineering Pathamuttom, Kerala, India.

^[3] Project Engineer, Noel Apartments Thiruvalla, Kerala, India.

Corresponding Author Email: ^[1] nimmy.secm2022@saintgits.org, ^[2] gopika.moorthy@saintgits.org, ^[3] saiprasanthkrishnan@gmail.com

Abstract— A beam-column junction is a structural member that is subjected to transverse bending and axial compression at the same time. H Steel beams are beams that are composed of an H-steel core within a precast concrete beam. Advantage of H steel beam is its high bearing capacity compared to RC columns. Concrete Filled Steel Tubular (CFST) structure consists of hollow steel tube filled with plain or reinforced concrete. They are lighter than RC columns and are safer and dependable in seismic regions. The study is to find the seismic analysis of developed joints between H steel beam and CFST column under cyclic loading and to compare the behavior of those joints of CFST tubes with normal and Reduced Beam Section beams (RBS). The result aims to show a significant seismic behavior in RBS section than the normal beam section in terms of load- displacement hysteresis curve.

Index Terms— Concrete Filled Steel Tubular section, Reduced Beam Section

I. INTRODUCTION

For assuring the safety of structures, it is critical to design and detailing of beam -column junction in order to develop ultimate strength and deformation capabilities. The most popular beam – column joint used in everyday life is Concrete – filled steel tube (CFST) column and H- steel beam junction. CFST column is best known for their performance in load bearing capacity, ductility and energy absorption capacity. Also, it reduces the material and labor cost in the construction.

H – steel beam have stronger cross section than I -beams and lighter than RC beams. The seismic analysis was done through ANSYS workbench software.[1] The type of analysis used for cyclic loading is transient analysis. The design chosen for the CFST column, Normal beam and RBS beam are as per Eurocode 4.

II. ENGINEERING DATA

A. Structural steel (Q345)

- i) Density : 7850 kg/m³
- ii) Young's Modulus : 1.948x10⁵ MPa
- iii) Poisson's ratio : 0.3
- iv) Bilinear Isotropic Hardening:
Yield strength: 324MPa, Tangent Modulus: 1.45x10⁹Pa

B. Bolt

- i) Density : 7850 kg/m³
- ii) Young's Modulus : 2.06x10⁵MPa
- iii) Poisson's ratio : 0.3

iv) Bilinear Isotropic Hardening:

Yield strength: 900MPa, Tangent Modulus: 1450MPa
Grade : 10.9 M20

C. Figures

- i) Density: 2300kg/m³
- ii) Young's Modulus: 3x10¹⁰Pa
- iii) Poisson ratio: 0.18
- iv) Grade : M40. The Multilinear Isotropic Hardening of M40 is as per he Table 1.

Table 1: Multilinear Isotropic Hardening

Plastic Strain (1/mm)	Stress (MPa)	Plastic Strain (1/mm)	Stress (MPa)
0	0.5	0.0016	33.218
0.0002	5.3097	0.0018	35.294
0.0004	10.48	0.002	36.923
0.0006	15.385	0.0022	38.15
0.0008	19.917	0.0024	39.024
0.001	24	0.0026	39.594
0.0012	27.586	0.0028	39.905
0.0014	30.567	0.003, 0.0032, 0.0034	40

III. ANALYSIS SETTINGS

As per the Eurocode 4, the length of steel beam was 1360mm. Height of CFST column was [2] 1000mm. Cross sections of square hollow CFST column and H- shaped steel beam were 250mm x 250mm x 6mm and 300mm x 150mm x 6.5mm x 9mm respectively as per the figure 1.

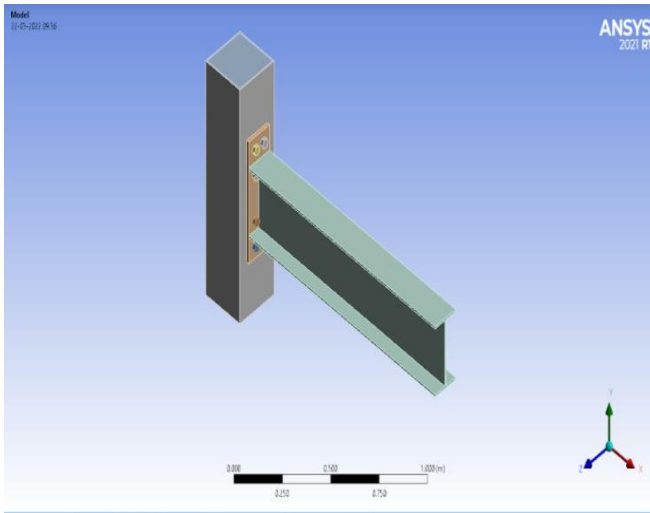


Figure 1: Geometry of the normal structure

For a time step of 32 seconds, Maximum cyclic displacement is 80mm at the beam. A pretensioning force of 1.55×10^5 N was applied on one end of the bolts. An axial force of 3000kN [4] was applied on the top and remote displacements were distributed on top and bottom sides of columns.

Second beam chosen was Reduced Beam Section (RBS). A radius of 15mm, 30mm, [6] 35mm was inserted in the centre of beam. 372mm was taken on both sides away from the centre of beam. The geometry of RBS beam and CFST column is shown in figure 2.

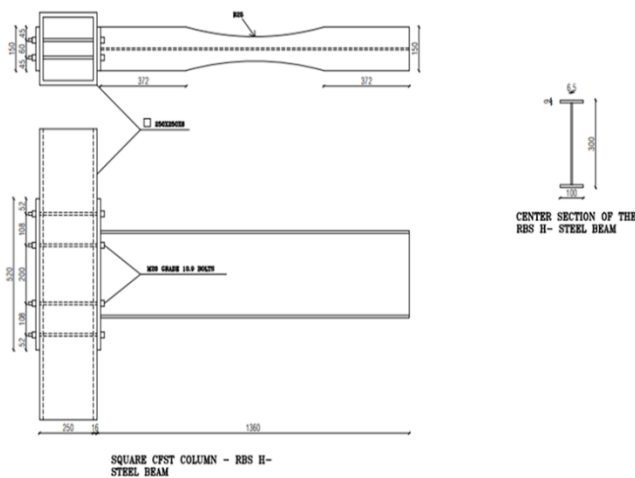


Figure 2: Framework of RBS – CFST structure

IV. RESULTS

The yield stress is the minimum stress where the material starts to deform. The ultimate stress is the maximum stress before the material fails. The failure stress is 0.87 times the ultimate stress where 0.87 is the Factor of Safety (FoS).

The maximum yield displacement attained was 28.46mm from a yield stress of [3]75.423kN. The ultimate and failure stress were 123.17kN and 104.72kN respectively and the ultimate and failure displacement are 61.6 mm and 51.68mm respectively (figure 4). The total deformation of normal structure is as shown in the figure 3.

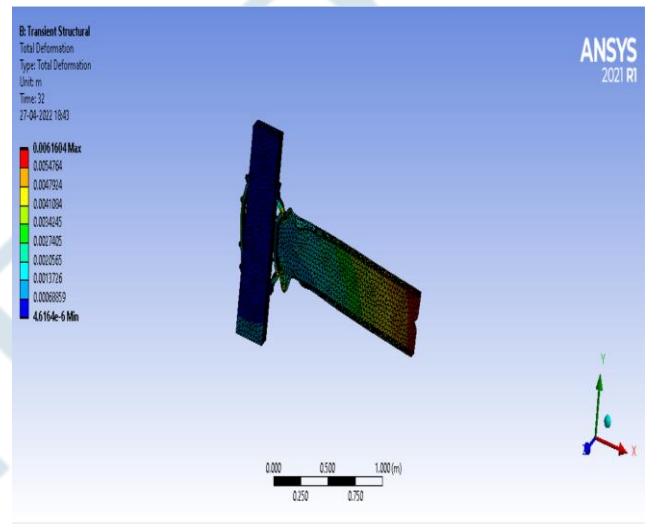


Figure 3: Total deformation of Normal structure

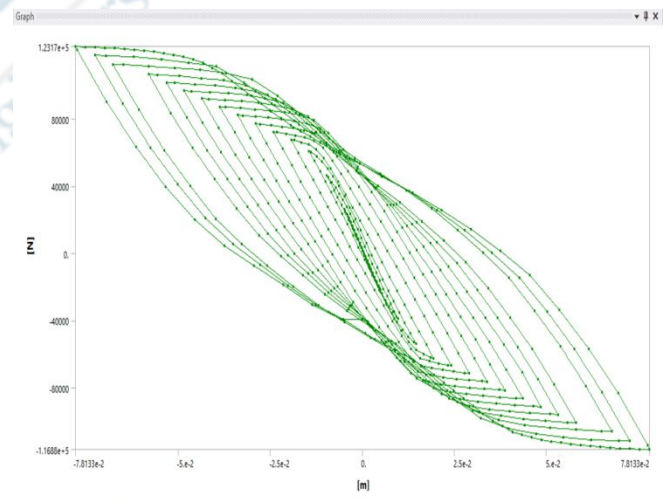


Figure 4: Hysteresis curve of normal structure

A comparative study of radius 15mm, 30mm and 35mm RBS beams along with the CFST column was done on cyclic loading. The RBS structure of radius 35mm showed the higher yield stress, [5] ultimate stress and yield stress than the normal structure. There were no significance change observed from the other lower radius of RBS beam (table 2).

Table 2: Comparison table of R15, R30 and R35 RBS beam

Displacement (mm)	Force reaction (Yield state) (N)	Displacement (mm)	Force reaction (Ultimate state) (N)	Displacement (mm)	Force reaction (Failure state) (N)
30.85	72137	61.734	117300	53.708	102051
Displacement (mm)	Force reaction (Yield state) (N)	Displacement (mm)	Force reaction (Ultimate state) (N)	Displacement (mm)	Force reaction (Failure state) (N)
29.84	71278	53.225	121210	45.24	103028

The hysteresis curve of R 35 possess higher area than the other RBS structures as per the figure 5,6 and 7 respectively.

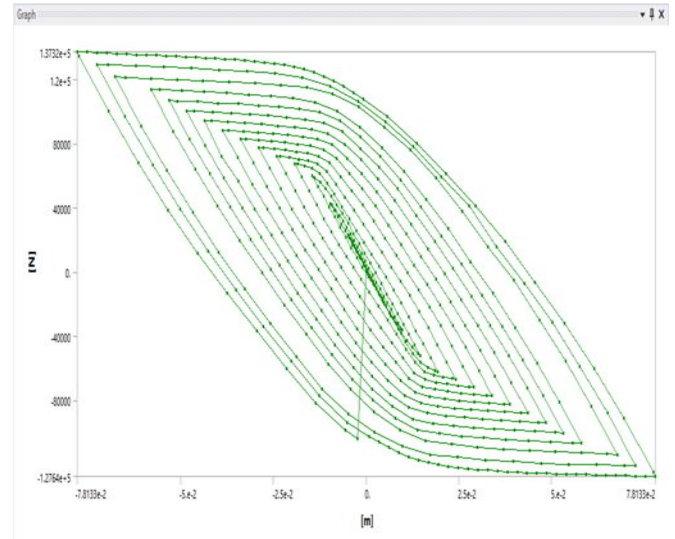


Figure 7: Hysteresis curve of R35 RBS structure

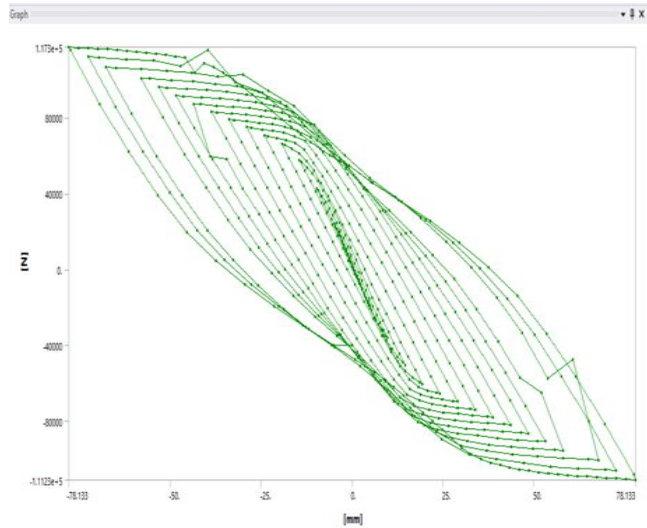


Figure 5: Hysteresis curve of R15 RBS structure

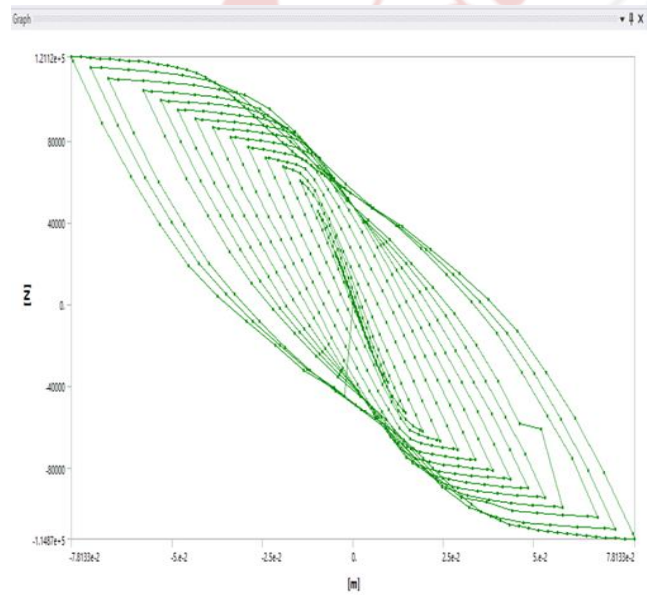


Figure 6: Hysteresis curve of R30 RBS structure

V. CONCLUSION

CFST column with RBS sections of radius 35mm i.e. higher radius showed higher yield ultimate and failure load bearing capacity than CFST column with normal beam sections. Higher radius RBS sections are suitable for earthquake prone regions.

REFERENCES

- [1] Shuaike Feng, Dongzi Guan (2021), "Experimental study on seismic behavior of joints connecting precast H-steel reinforced concrete beams and concrete-filled steel tube columns", *Journal of building engineering*, 45(2022) 103444
- [2] Khanh Be Le, Vui Van Cao (2021), "Numerical study of Circular Concrete Filled Steel Tubes subjected to pure torsion", *Buildings* 2021, 26, 397
- [3] Ernesto Grande, Mauro Limba (2021), "A Nonlinear Macro-model for the analysis of Monotonic and cyclic behaviour of exterior RC beam- column joints", *Frontiers in Materials*, Volume 8, Article 7199716
- [4] Ilanthilir A, Maheswaran J (2020), "Concrete-filled steel tube columns of different cross-sectional shapes under axial compression: A review", *IOP Conf. Series: Materials Science and Engineering*, 983 (2020) 012007
- [5] Fariha Lara Brinda, Sharmin Reza Chowdhary (2020), "A Review Paper on Increasing Torsional Strength of RC Beam using Steel Fiber Reinforced Concrete", *Journal of Structural Engineering*, 67(2020), 108956
- [6] Noor Asim Mohd Radzi, Roszilah Hamid (2020), "A review of Precast Concrete Beam-to-Column Connections Subjected to Severe Fire Conditions", *Advances in Civil Engineering*, Volume 2020, Article ID 8831120, 23 pages.